


Programmable f/I-f/f converter



5223A

- Pulse calculator
- Frequency generator
- Galvanic isolation
- Analog current and voltage output
- PNP / NPN output, optional relays
- Universal supply

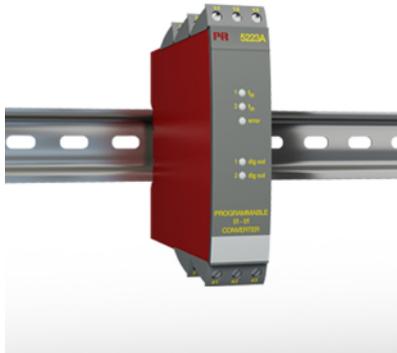

Advanced features

- The 5223 transmitter can be configured with a standard PC and the Loop Link communications unit, or delivered fully configured.


Application

- The f/I function performs frequency to current and voltage conversion.
- The f/f function can be used for pulse division or multiplication and as a buffer collecting fast pulse trains.
- A scale factor may be entered in all functions. Using both digital inputs, pulse addition or subtraction are possible.
- The frequency generator function is used as e.g. a time base or clock generator.
- Input and supply polarity reversal protection.
- Current and voltage output signals galvanically separated from the supply and the inputs.
- Programmable digital outputs including NPN, PNP or relay options.

Technical characteristics

- 5 front LEDs, indicating f1 and f2 active inputs (not NPN), Dig.out. 1 and 2 active outputs, and a programmable error signal.
- Analog current output can be configured to any current within 0...20 mA range.
- Voltage output range is selectable between 0...10 VDC and 0...1 VDC by use of internal jumpers.
- Programming can be performed with or without a power supply.

Connection

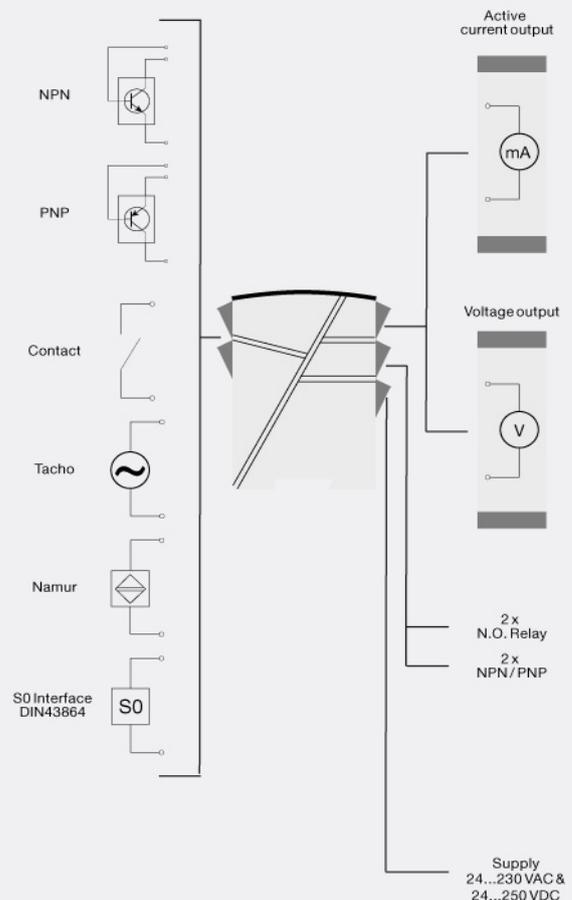

Environmental Conditions

| | |
|------------------------------|----------------------|
| Specifications range..... | -20°C to +60°C |
| Calibration temperature..... | 20...28°C |
| Relative humidity..... | < 95% RH (non-cond.) |
| Protection degree..... | IP20 |

Mechanical specifications

| | |
|----------------------------|---------------------------------------|
| Dimensions (HxWxD)..... | 109 x 23.5 x 130 mm |
| Weight approx..... | 240 g |
| DIN rail type..... | DIN 46277 |
| Wire size..... | 1 x 2.5 mm ² stranded wire |
| Screw terminal torque..... | 0.5 Nm |

Common specifications

| | |
|---|---|
| Supply voltage, universal..... | 21.6...253 VAC, 50...60 Hz or 19.2...300 VDC |
| Fuse..... | 400 mA SB / 250 VAC |
| Max. power consumption..... | 3.5 W |
| Internal consumption..... | 3 W |
| Isolation voltage, test / working..... | 3.75 kVAC / 250 VAC |
| Power-up delay..... | 0...999 s |
| Warm-up time..... | 1 min. |
| Communications interface..... | Loop Link |
| Signal / noise ratio..... | Min. 60 dB |
| Response time, analog..... | < 60 ms + period |
| Response time, digital output..... | < 50 ms + period |
| Signal dynamics, output..... | 16 bit |
| Effect of supply voltage change..... | < 0.005% of span / VDC |
| Auxiliary voltage: NAMUR supply..... | 8.3 VDC ±0.5 VDC / 8 mA |
| S0 supply..... | 17 VDC / 20 mA |
| NPN / PNP supply..... | 17 VDC / 20 mA |
| Special supply (programmable)..... | 5...17 VDC / 20 mA |
| Temperature coefficient..... | < ±0.01% of span / °C |
| Linearity error..... | < 0.1% of span |
| EMC immunity influence..... | < ±0.5% |

Input specifications

| | |
|---|-----------------------------------|
| Max. offset..... | 90% of selected max. frequency |
| Measurement range..... | 0...20 kHz |
| Min. measurement range..... | 0.001 Hz |
| Max. frequency, with input filter ON..... | 50 Hz |
| Min. period time with input filter ON..... | 20 ms |
| Input types..... | NAMUR acc. to DIN 19234 |
| Input types..... | Tacho |
| Input types..... | NPN / PNP |
| Input types..... | 2-phase encoder |
| Input types..... | TTL |
| Input types..... | S0 acc. to DIN 43864 |

Output specifications

| | |
|--|--------------------------------------|
| Max. offset..... | 50% of selected max. value |
| Current output: Signal range..... | 0...20 mA |
| Min. signal range..... | 5 mA |
| Updating time..... | 20 ms |
| Load (max.)..... | 20 mA/600 Ω/12 VDC |
| Load stability, current output..... | ≤0.01% of span/100 Ω |
| Current limit..... | < 23 mA |
| Voltage output through internal shunt..... | See manual for details |
| Other output types..... | Active outputs (NPN / PNP) |
| Other output types..... | f/f converter output |
| Other output types..... | Frequency generator |
| Relay output: Max. switching frequency..... | 20 Hz |
| Max. voltage..... | 250 VRMS |
| Max. current..... | 2 AAC |
| Max. AC power..... | 100 VA |
| Max. load at 24 VDC..... | 1 A |
| *of span..... | = Of the presently selected range |

Approvals

| | |
|----------------|---------------------------|
| EMC..... | EN 61326-1 |
| LVD..... | EN 61010-1 |
| PELV/SELV..... | IEC 364-4-41 and EN 60742 |
| ATEX..... | KEMA 04ATEX1001 |
| GOST R..... | Yes |
| GOST Ex..... | Yes |