


CENTER 120 122 MULTIMETER

AUTORANGE, RS-232, DATA LOGGER, TRUE RMS

FROM 09:53:45P TO 10:34:45A Recording Rate 00:02

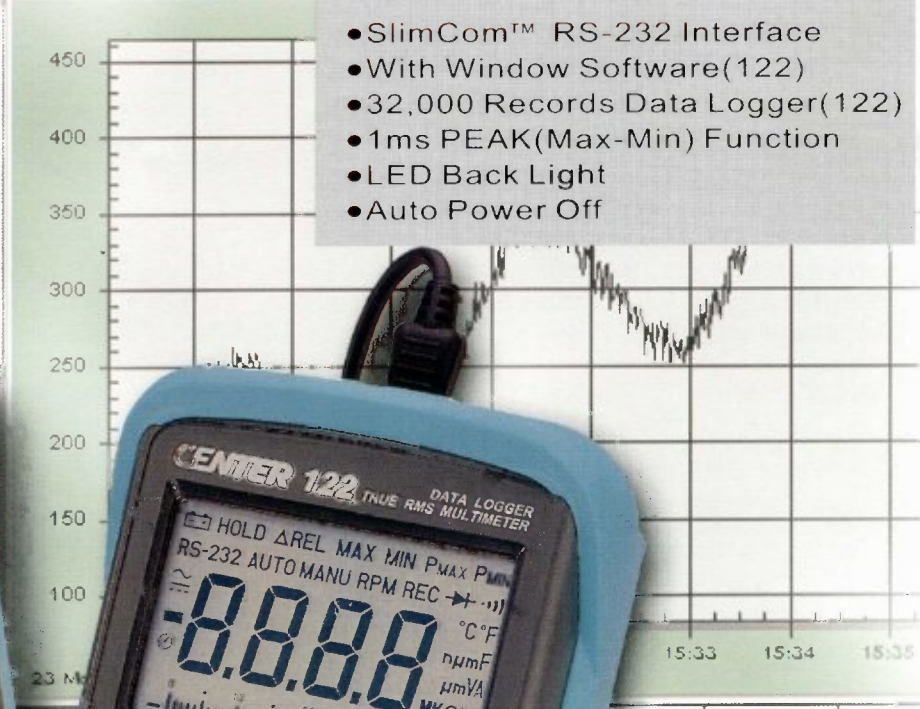

Value	Unit
122.0	mV
122.0	mV
122.0	mV
122.0	mV



CE IEC 1010 1000V CAT III

CENTER®

GENERAL SPECIFICATIONS

- Display:** 3-3/4 digital(4000 count) display
- Sample Rate:** 2 times/sec for digital reading;
20 times/sec for analog bar indication
- Safety:** IEC 1010 1000V CAT III
- Auto Power Off:** 30 minutes
- Battery Type:** 9V, NEDA 1604, IEC 6F22, JIS 006P
- Battery Life:** 100 hours typical (alkaline)
- Size:** 198×86×38mm (7.8"×3.4"×1.5")
- With holster:** 209×94×48mm (8.2"×3.7"×1.9")
- Weight:** Approx.430g **With holster:** Approx.600g
- Accessories:** Operation manual, Test lead, Battery ,Holster, Temperature converter, K Type bead sensor (CENTER 122) RS-232 cable and CENTER SE-120 software (CENTER 122)

Download data for analysis or monitoring the real time data through easy access "SlimCom" RS-232 connection.



LED back light system for operation under poor illumination.

ELECTRICAL SPECIFICATIONS

Function	Range	Resolution	Accuracy
DCV	400mV	0.1mV	±(0.3%rdg+2dgt)
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	1000V	1V	
ACV	400mV	0.1mV	±(0.5%rdg+5dgt)
	4V	0.001V	
	40V	0.01V	
	400V	0.1V	
	750V	1V	
DCA	400uA	0.1uA	±(0.8%rdg+2dgt)
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
ACA	400uA	0.1uA	±(1%rdg+5dgt)
	4000uA	1uA	
	40mA	0.01mA	
	400mA	0.1mA	
	10A	0.01A	
Ωms	400 Ω	0.1 Ω	±(0.6%rdg+2dgt)
	4K Ω	1 Ω	
	40K Ω	10 Ω	
	400K Ω	100 Ω	
	4M Ω	1K Ω	
+	40M Ω	10K Ω	±(1.0%rdg+3dgt)
	4nF	1pF	
	40nF	10pF	
	400nF	100pF	
	4uF	1nF	
+	40uF	10nF	±(1.9%rdg+20dgt)
	400uF	100nF	
	4mF	1uF	
	40mF	10uF	
	Hz VA-Hz	4KHz	
40KHz		10Hz	
400KHz		100Hz	
4MHz		1KHz	
40MHz		10KHz	
RPM	40KRPM	0.01KRPM	±(0.05%rdg+1dgt)
	400KRPM	0.1KRPM	
	4MRPM	1KRPM	
	40MRPM	10KRPM	
	400MRPM	100KRPM	
TEMP	-50°C~1000°C	1°C	1%rdg+2°C
	-58°F~1832°F	1°F	1%rdg+4°F
→	→	Test Current: 0.6mA	
·))	·))	Active Sound Level: ≤40 Ω	



Shock absorbing holster add an extra protection and provide a built-in tilt stand.

Other color choices for Holster



* The specifications and other information in this catalogue are subject to change without prior notice.

CENTER[®]

CENTER TECHNOLOGY CORP.

4/F., No.415, Jung-Jeng Rd., 238 Shu-Lin Chien, Taipei, Taiwan
 TEL: 886-2-26763926 E-Mail: center@centertek.com
 FAX: 886-2-26763925 http://www.centertek.com

Distributed by:

