




Principal characteristics

- The transducer's compactness makes it suitable for installation in small spaces and for detecting small shifts.
- The side connection creates a through-rod structure with double rod support, guaranteeing greater overall strength of the transducer.
- Installation is simplified by the lack of electrical signal variation at output outside theoretical electrical stroke.
- Ideal for small mechanical devices, valves, and test tools and benches.

TECHNICAL DATA

Useful electrical stroke (C.E.U.)	25/50/75/100/150
Resolution	Infinite
Independent linearity (within C.E.U.)	see table
Displacement speed	≤ 10 m/s
Displacement force	≤ 0.30 N
Life	$>25 \times 10^6$ m strokes, or 100×10^6 operations, whichever is less (within C.E.U.)
Vibrations	5...2000Hz, $A_{max} = 0.75$ mm a_{max} . = 20 g
Shock	50 g, 11ms.
Tolerance on resistance	$\pm 20\%$
Recommended cursor current	$< 0.1 \mu A$
Maximum cursor current	10mA
Maximum applicable voltage	see table
Electrical isolation	$>100 M\Omega$ a 500V~, 1bar, 2s
Dielectric strength	$< 100 \mu A$ a 500V~, 50Hz, 2s, 1bar
Dissipation at 40°C (0W at 120°C)	see table
Actual Temperature Coefficient of the output voltage	$< 1.5 ppm/^{\circ}C$
Working temperature	-30...+100°C
Storage temperature	-50...+120°C
Case material	Anodised aluminium Nylon 66 G 25
Control rod material	Stainless steel AISI 303
Fixing	Brackets with variable longitudinal axis

MECHANICAL DIMENSIONS

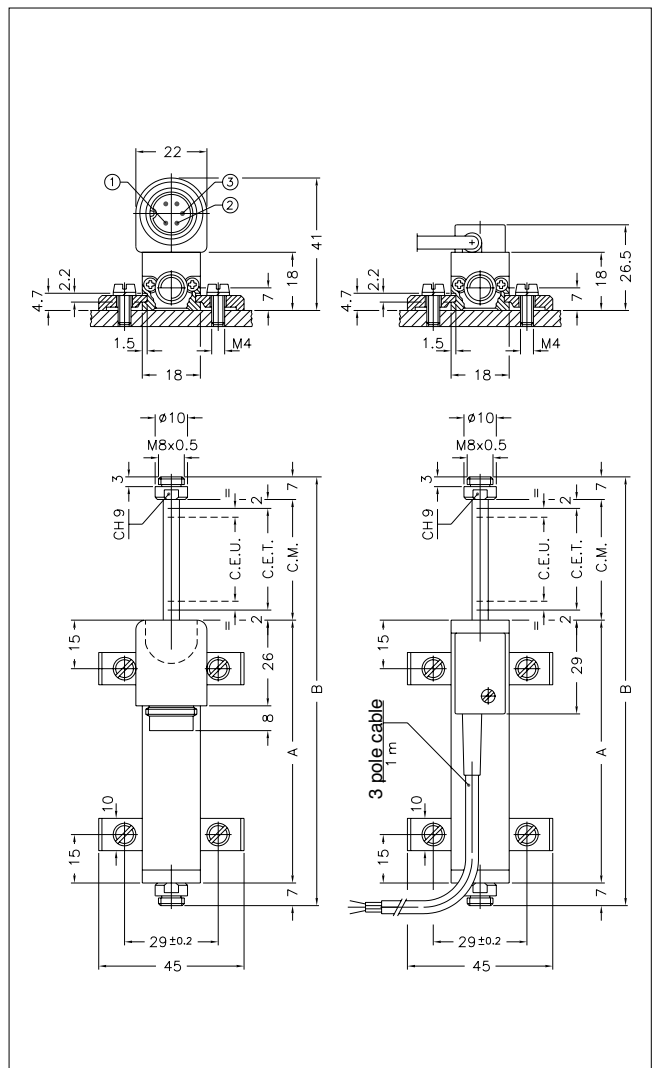


Important: all the data reported in the catalogue linearity, lifetime, temperature coefficient are valid for a sensor utilization as a ratiometric device with a max current across the cursor $I_c \leq 0.1 \mu A$.

MECHANICAL / ELECTRICAL DATA

Model		25	50	75	100	150
Useful electrical stroke (C.E.U.) +3/-0	mm	25	50	75	100	150
Theoretical electrical stroke (C.E.T.) ±1	mm	C.E.U. +1				
Resistance (C.E.T.)	kΩ	1	5	5	5	5
Independent linearity (within C.E.U.)	± %	0.2	0.1	0.1	0.1	0.05
Dissipation at 40° (0W at 120°C)	W	0.6	1.2	1.8	2.5	3.6
Maximum applicable voltage	V	25	60			
Mechanical stroke (C.M.)	mm	C.E.U. + 5				
Case length (A)	mm	C.E.U. + 38				
Total length (B)	mm	107	157	207	257	357


ELECTRICAL CONNECTIONS

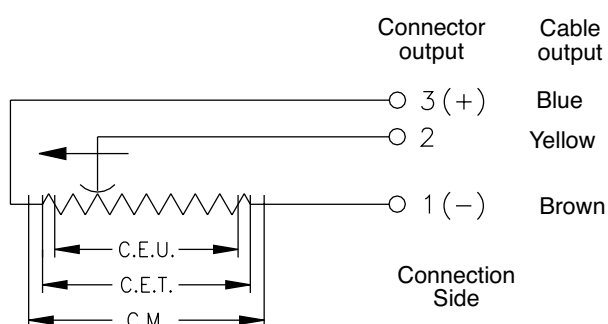


INSTALLATION INSTRUCTIONS

- Respect the indicated electrical connections (DO NOT use the transducer as a variable resistance)
- When calibrating the transducer, be careful to set the stroke so that the output does not drop below 1% or rise beyond 99% of the supply voltage.

COUPLING JOINT

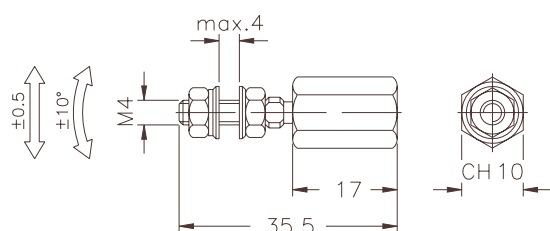

OPTIONAL FIXING KIT PKIT006

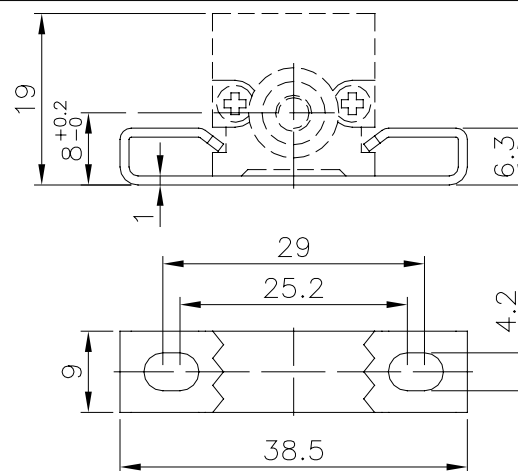

ORDER CODE

Displacement transducer PY1	☐ S ☐ M	☐ 0 ☐ 0 ☐ 0 ☐ X ☐ 0 ☐ 0 ☐ 0												
3 pole PVC cable output 3x0.25 1m.	F	<table border="1"> <tr> <td>No certificate attached</td> <td>0</td> </tr> <tr> <td>Linearity curve to be attached</td> <td>L</td> </tr> <tr> <td>Standard mounting brackets (PKIT005)</td> <td>X</td> </tr> <tr> <td>Optional mounting brackets (PKIT006)</td> <td>S</td> </tr> <tr> <td>Color of plastic heads (green)</td> <td>0</td> </tr> <tr> <td>Color of plastic heads (black)</td> <td>N</td> </tr> </table>	No certificate attached	0	Linearity curve to be attached	L	Standard mounting brackets (PKIT005)	X	Optional mounting brackets (PKIT006)	S	Color of plastic heads (green)	0	Color of plastic heads (black)	N
No certificate attached	0													
Linearity curve to be attached	L													
Standard mounting brackets (PKIT005)	X													
Optional mounting brackets (PKIT006)	S													
Color of plastic heads (green)	0													
Color of plastic heads (black)	N													
5 pole connector output DIN 43322	C													
Model	<table border="1"> <tr> <td>Cable length (in meters)</td> <td></td> </tr> </table> This part of the code only applies to the model with cable output	Cable length (in meters)												
Cable length (in meters)														

Ex.: **PY1 - C - 100**

Displacement transducer model PY1, 5-pole connector output, useful electrical stroke (C.E.U.) 100mm.

ACCESSORIES

STANDARD ACCESSORIES

Fixing kit: 4 brackets, M4x10 screws, grower **PKIT005**

Fixing kit: 2 "wraparound" brackets (0000X000S00 configurator option) **PKIT006**

Coupling joint **PKIT020**

OPTIONAL ACCESSORIES

5-pin axial female PCB connector DIN43322 IP40 clamp for wire ø4 - ø6 mm **CON011**

5-pin axial female PCB connector DIN43322 IP65 clamp PG7 for wire ø4 - ø6 mm **CON012**

5-pin 90° radial female PCB connector DIN43322 IP40 clamp for wire ø4 - ø6 mm **CON013**

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice