



BIPOLAR ISOLATED CONVERTER/SPLITTER

- Conversion of voltage and current bipolar process signals to uni-/bipolar signals
- Multiple signal ranges are selectable via DIP-switches
- Splitter function: 1 signal in and 2 signals out
- Excellent accuracy, better than 0.05 % of selected range and high output load stability
- Slimline 6 mm housing

Application:

- The 3118 is an isolating converter and splitter which can be used for signal conversion of standard bipolar analogue process signals into two individual unipolar analogue signals.
- The unit offers 4-port isolation and provides surge suppression and protects control systems from transients and noise.
- The 3118 also eliminates ground loops and can be used for measuring floating signals.
- Mounting of the 3118 can be in Safe area or in Zone 2 and Cl. 1 Div 2 area and is approved for marine applications.
- The analogue output can be easily configured and programmed to be bipolar in the ranges ± 10 mA and ± 20 mA (*).


Technical characteristics:

- Flexible 24 VDC ($\pm 30\%$) supply via power rail or connectors.
- Excellent conversion accuracy, better than 0.05% of selected range.
- A green front LED indicates operation status for the device.
- All terminals are protected against overvoltage and polarity error.
- Meeting the NAMUR NE21 recommendations, the 3118 ensures top measurement performance in harsh EMC environments.
- High galvanic isolation of 2.5 kVAC.
- Fast input to output response time < 7 ms / > 100 Hz – 10 Hz bandwidth damping possible via DIP-switch.
- Excellent signal/noise ratio > 60 dB.


Mounting / installation / programming:

- Easy configuration of factory calibrated measurement ranges via DIP-switches.
- A very low power consumption allows DIN rail mounting without the need for any air gap.
- Wide temperature operation range: $-25\ldots+70^\circ\text{C}$.

CONNECTIONS

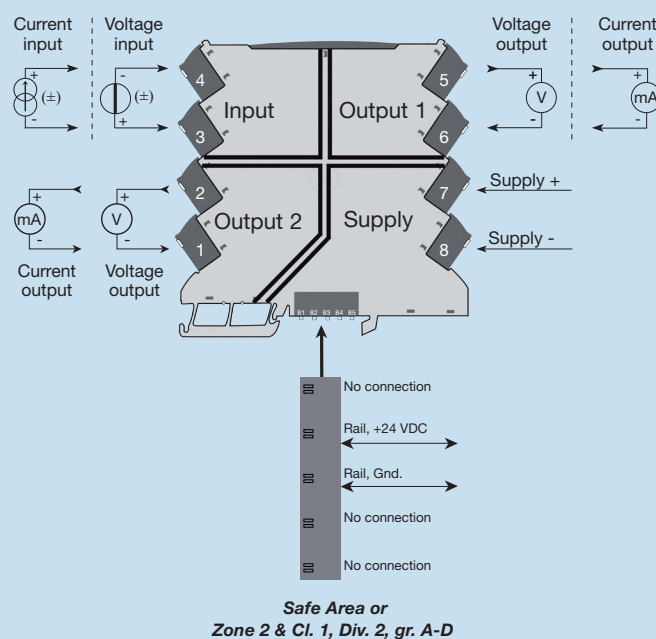

(*) Bipolar Input to bipolar output wiring set-up:

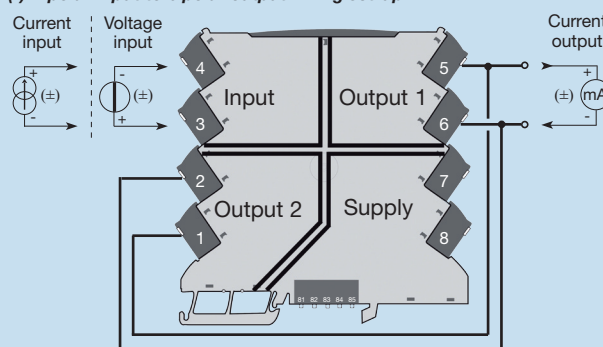

Order codes for 3118:

Type	Specification
3118	Bipolar isolated converter/splitter

Environmental conditions:

Specifications range..... -25°C to +70°C
 Storage temperature..... -40°C to +85°C
 Calibration temperature..... 20...28°C
 Relative humidity..... < 95% RH (non-cond.)
 Protection degree..... IP20
 Installation in pollution degree 2 & measurement / overvoltage category II

Mechanical specifications:

Dimensions (HxWxD)..... 113 x 6.1 x 115 mm
 Weight approx..... 70 g
 DIN rail type..... DIN EN 60715 - 35 mm
 Wire size..... 0.13...2.5 mm² / AWG
 26...12 stranded wire
 Screw terminal torque..... 0.5 Nm

Common electrical specifications:

Supply voltage, DC..... 16.8...31.2 VDC
 Internal consumption, typ./max..... 0.4 W / 0.65 W
 Power consumption, max..... 0.8 W
 Isolation voltage, test..... 2.5 kVAC
 Working isolation voltage..... 300 VAC / 250 VAC (Ex)
 MTBF, acc. to IEC 61709 (SN29500)..... > 187 years
 Signal / noise ratio..... > 60 dB
 Cut-off frequency (3 dB)..... > 100 Hz or 10 Hz
 (selectable via DIP-switch)
 Response time (0...90%, 100...10%)..... < 7 ms or < 44 ms

of span = of the selected range

Accuracy values		
Input type	Absolute accuracy	Temperature coefficient
All	≤ ± 0.05% of span	≤ ± 0.01% of span / °C

EMC immunity influence..... < ±0.5% of span
 Extended EMC immunity:
 NAMUR NE 21, A criterion, burst..... < ±1% of span

Accessories for 3118:

Type	Function
3405	Power rail connector unit
9400	Power rail
9404	Module stop

Input specifications:

Current input:

Programmable ranges..... ± 10 and ± 20 mA
 Functional range..... -23 ... +23 mA
 Input voltage drop..... < 1 VDC @ 23 mA

Voltage input:

Programmable ranges..... ± 5 and ± 10 V
 Functional range..... -11.5 ... +11.5 V
 Input resistance..... ≥ 1 MΩ

Output specifications:

Current output:

Programmable ranges..... 0...20 and 4...20 mA
 Functional range..... 0...23 mA
 *Bipolar wiring and programming set-up... ±10 and ± 20 mA
 Load, max..... 23 mA / 300 Ω / per ch.
 Load stability..... ≤ 0.002% of span / 100 Ω
 Current limit..... ≤ 28 mA

Voltage output:

Programmable ranges..... 0...5, 1...5, 0...10, 2...10 V
 Functional range..... 0...11.5 V
 Load..... > 10 kΩ

Approvals:

EMC 2004/108/EC..... EN 61326-1
 LVD 2006/95/EC..... EN 61010-1
 UL, Standard for Safety..... UL 61010-1
 Safe Isolation..... EN 61140
 GOST R

Marine:

Det Norske Veritas, Ships & Offshore..... Stand. f. Certific. No. 2.4
 Germanischer Lloyd..... VI-7-2

Ex:

ATEX 94/9/EC..... KEMA 10ATEX0147 X
 IECEx..... KEM 10.0068 X
 c FM us..... 3041043-C

DIP-switch configuration:

(DIP-switch positions are only read at power up)
 * = bipolar wiring set-up

Filter ON
 Bandwidth
 10 Hz

Filter OFF
 Bandwidth
 > 100 Hz

Input
 Current
 -10...+10 mA

Input
 Current
 -20...+20 mA

Input
 Voltage
 -5...+5 V

Input
 Voltage
 -10...+10 V

Output ch. 1
 Current
 0...20 mA

Output ch. 1
 Current
 4...20 mA

Output ch. 1
 Current
 ± 20 mA set-up*

Output ch. 1
 Current
 ± 10 mA set-up*

Output ch. 1
 Voltage
 0...10 V

Output ch. 1
 Voltage
 2...10 V

Output ch. 1
 Voltage
 0...5 V

Output ch. 1
 Voltage
 1...5 V

Output ch. 2
 Current
 0...20 mA

Output ch. 2
 Current
 4...20 mA

Output ch. 2
 Current
 ± 20 mA set-up*


Output ch. 2
 Current
 ± 10 mA set-up*

Output ch. 2
 Voltage
 0...10 V

Output ch. 2
 Voltage
 2...10 V


Output ch. 2
 Voltage
 0...5 V

Output ch. 2
 Voltage
 1...5 V



Installation on 35 mm DIN rail

The system 3000 device must be supported by module stops for marine applications.
 - PR part number 9404 -



Marking

The front cover of the system 3000 units has been designed with an area for affixation of a click-on marker.
 The area assigned to the marker measures 5 x 7.5 mm.
 Weidmüller's MultiCard System markers, type MF 5/7.5, are suitable.

