


FEATURES

- T1-T2 function
- Temperature alarm function
- Data Hold function
- Adjustable auto power off timer
- Fast response with high accuracy
- Measures K, J, E, T type thermocouples
- Min/Max/Avg recording of all channels
- USB interface, PC software included
- Datalogging up to 32,000 points each channel
- Large backlit LCD shows all channels on display
- Recall function to instantly read-out up to 100 sets manually saved data
- Bluetooth capability



NEW!

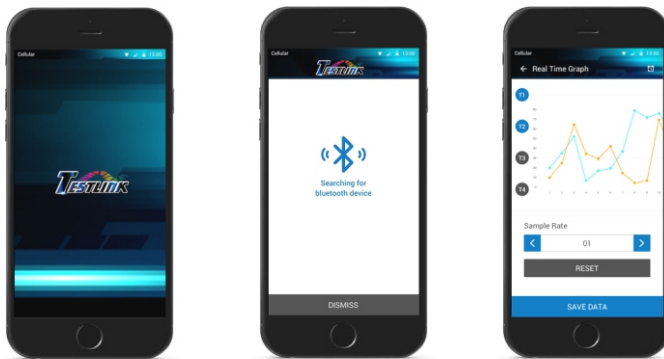

APP available for iOS & Android system



LED Back Light

SPECIFICATIONS

Measurement Range: -200°C~1370°C; -328°F~2498°F

Accuracy: $\pm 0.1\% \text{rdg} + 0.7^\circ\text{C}$; $\pm 0.1\% \text{rdg} + 1.4^\circ\text{F}$

Resolution: 0.1°C; 0.1°F

Input Protection: 30Vrms Maximum

Battery Type: 1.5V AAA size Battery x 4 pcs

Operating Condition: 0°C to 50°C(<80%RH)

Storage Condition: -10°C to 60°C(<70%RH)

Dimensions: 187 x 75 x 29 (mm)

Accessories:

User's manual, micro USB cable, battery, Windows software, carrying case, K type bead probe x 2 pcs, BT-01 Bluetooth adapter.



BT-01 Bluetooth Adapter



(Dimensions: 36x24x6.5 mm)



* The specifications and other information in this catalogue are subject to change without prior notice.

Distributed by:

CENTER

CENTER TECHNOLOGY CORP.

4F, No.415, Jung-Jeng Road, Shu-Lin Dist.,
New Taipei City 238, Taiwan

TEL: 886-2-26763926 E-Mail: center@centertek.com

FAX: 886-2-26763925 http: //www.centertek.com