

CENTER 31

HYGRO THERMOMETER



Features:

- Large , easy -to-read dual LCD displays Humidity and Temperature.
- 3%RH humidity accuracy.
- Desk or wall mount.
- MAX/MIN value monitor.
- Audible and visual alarms , with adjustable set points , warns if limits are exceeded.

CE


CENTER®

(With ALARM)

FEATURES

- Large, easy-to-read dual LCD displays Humidity and Temperature.
- 3%RH humidity accuracy.
- Calibration available on site.
- Desk or wall mount.
- MAX/MIN value monitor.
- Audible and visual alarms, with adjustable set points, warns if limits are exceeded.

▶ Large, Easy-to-read Dual LCD Display:

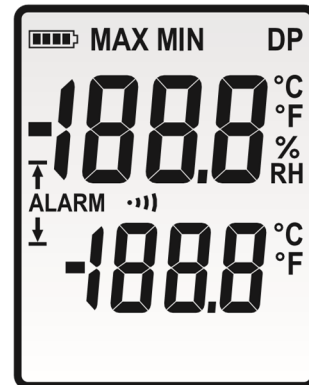

SPECIFICATIONS

Measurement Range:

Humidity: 0%RH~100%RH
 Temperature: -20°C~60°C ; -4°F~140°F
 Dew Point Temperature: -20°C~60°C ; -4°F~140°F

Resolution: 0.1°C/0.1°F/0.1%RH

Accuracy:

Temperature: ±0.8°C, 1.5°F
 Humidity: ±3.0%RH

Display: LCD, 2lines.

Measuring Interval: 20 sec.

Battery Type: 1.5V AAA size battery x 4

Battery Lifetime: Approx. one year

Operating Condition: 0°C to 40°C ; 32°F~104°F

Dimensions: 140(L)×105(W)×26(H)mm /265g

Accessories: Batteries, Instruction Manual

▶ Calibration



Back stand with hanging support.



33%RH / 75%RH Humidity Standard (OPTIONAL)

* The specifications and other information in this catalogue are subject to change without prior notice

CENTER[®]
CENTER TECHNOLOGY CORP.

4/F., NO.415, Jung-Jeng Rd., 238 Shu-Lin, Taipei, Taiwan

TEL: 886-2-26763926 E-Mail: center@centertek.com FAX: 886-2-26763925 http://www.centertek.com

Distributed by:

ECEFast NZ Ltd,

9A, 9-11 Laidlaw way

East Tamaki, Auckland 2019

sales@ecefaz.co.nz; toll free call: 0800 323 327